


HOW TO HOOKUP PROJECTOR TO THE LEAGUE COMPUTER WITH VGA CABLE


It is assumed that both the projector and computer have been removed from the bags

Step 1:
Remove Projector power cord and VGA Cable
from Projector Bag. If you cannot find the
VGA cable in the projector bag, look for it in
the computer bag.

Projector Power
Cord

VGA Cable

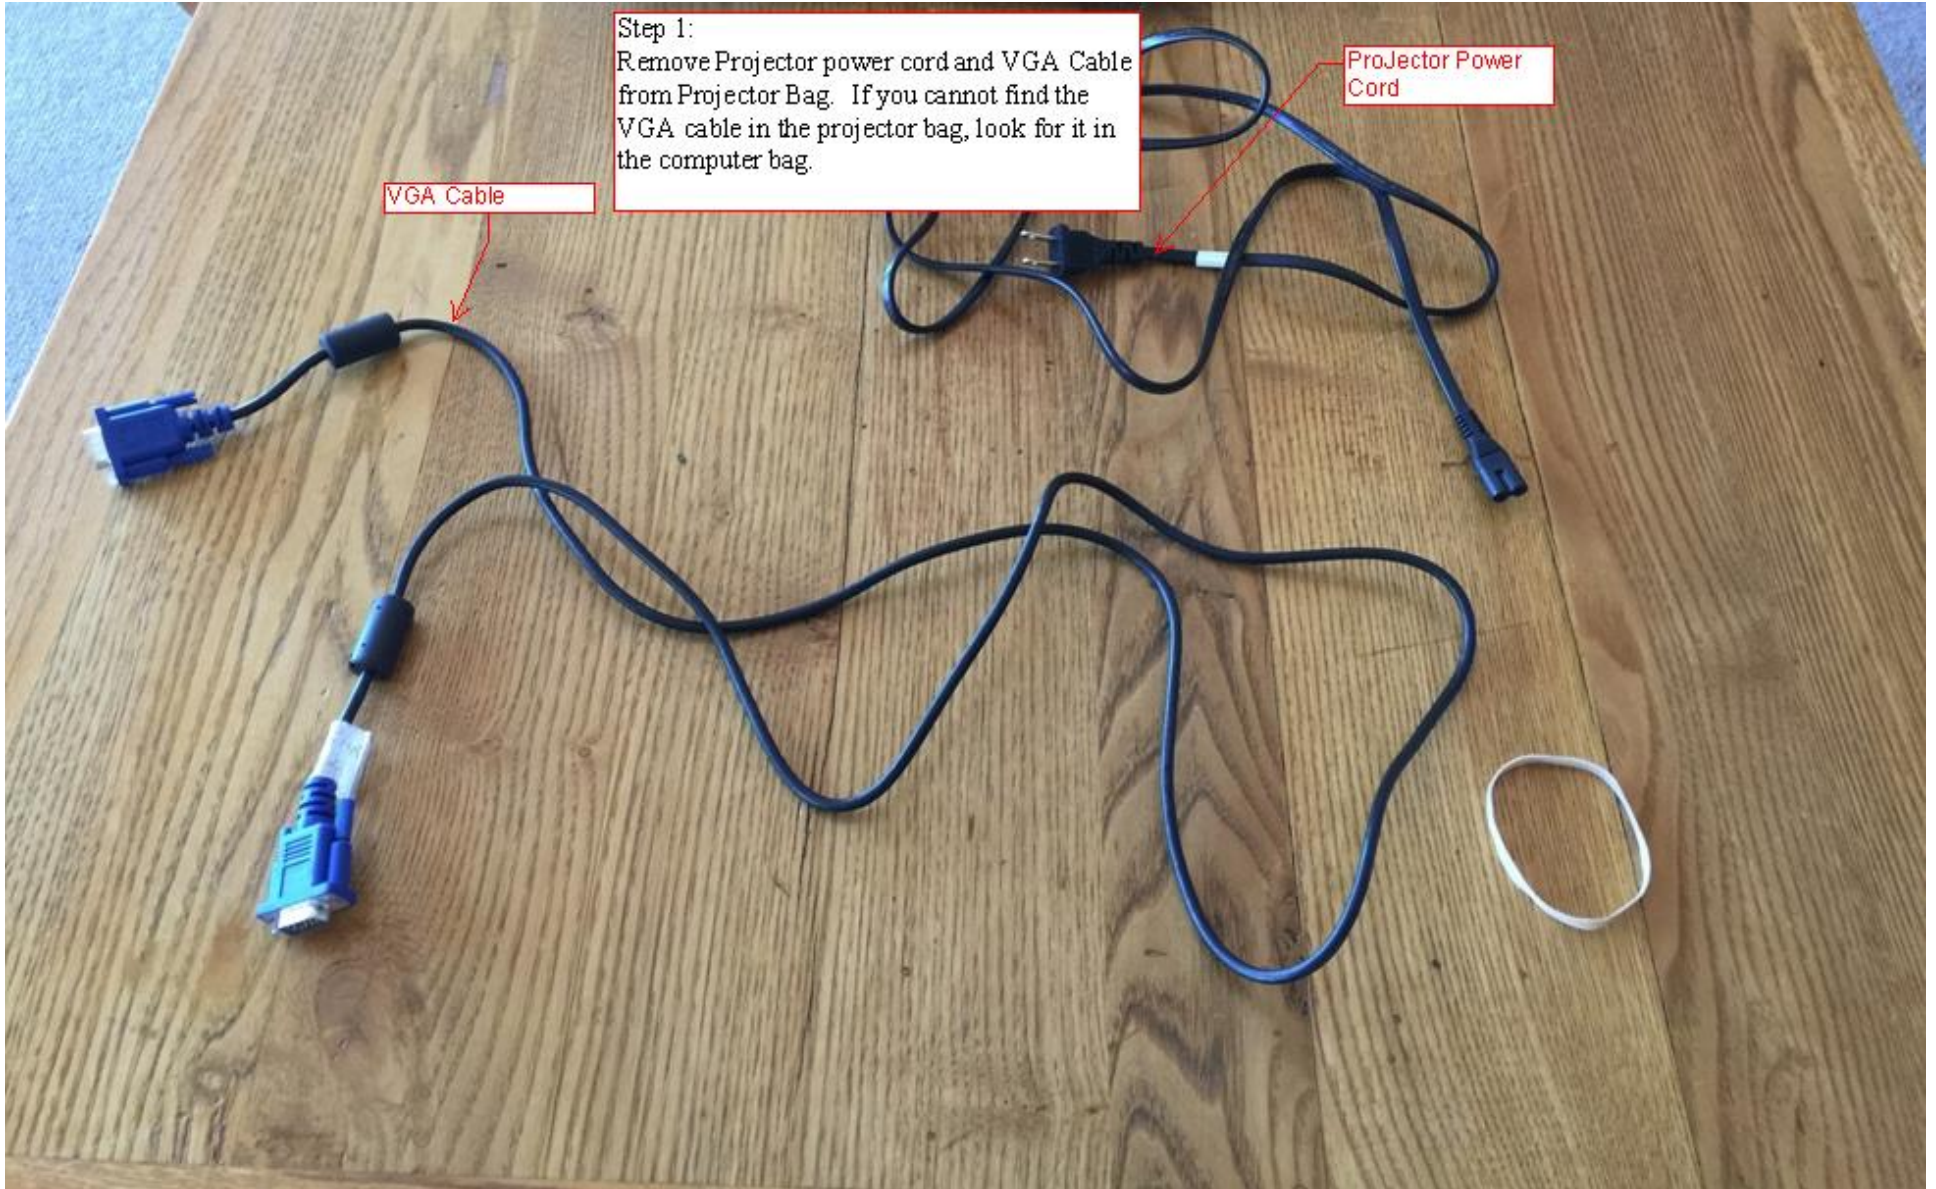

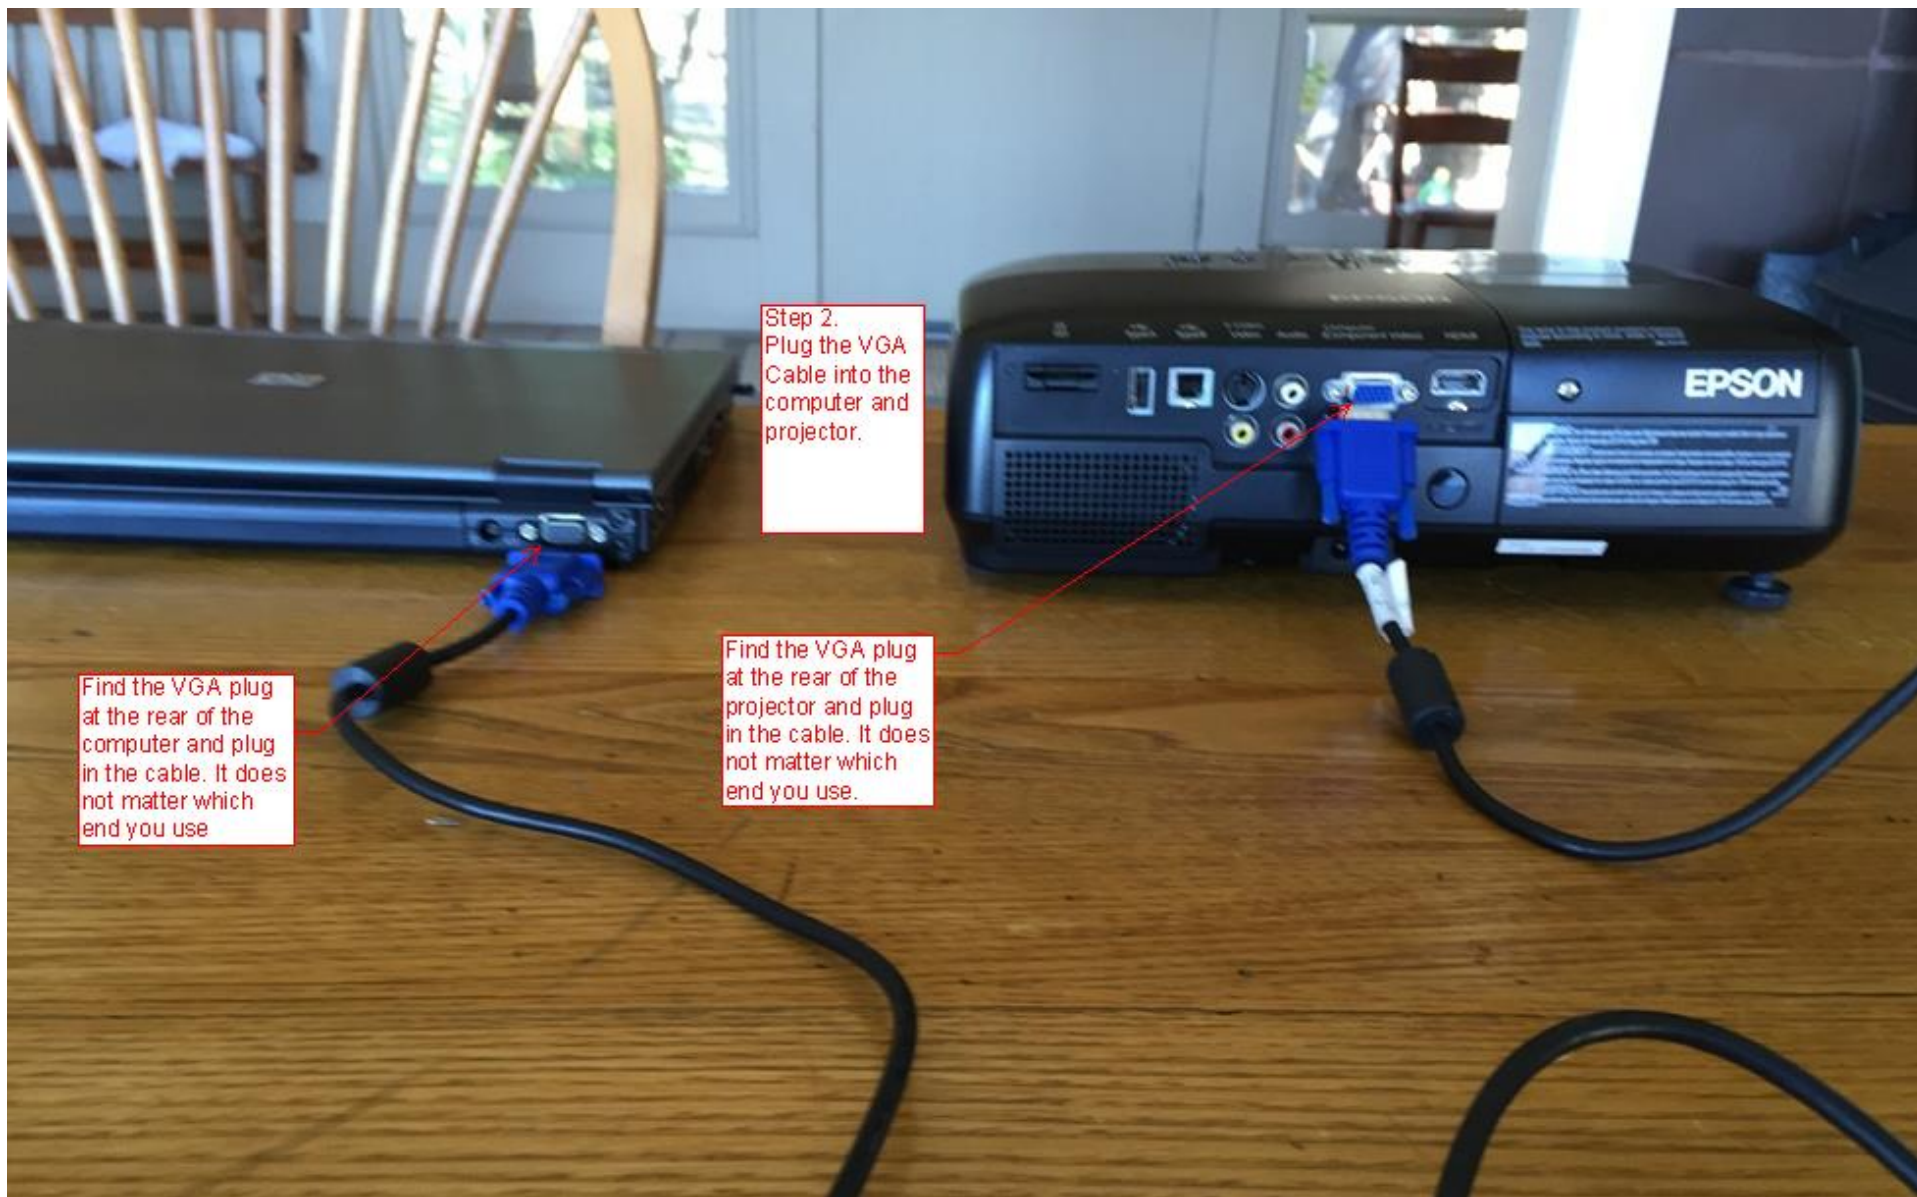

Step 2.
Plug the VGA
Cable into the
computer and
projector.

Find the VGA plug
at the rear of the
computer and plug
in the cable. It does
not matter which
end you use

Find the VGA plug
at the rear of the
projector and plug
in the cable. It does
not matter which
end you use.



VGA CABLE

Step 3
Plug the power cord into the
projector and to a electrical
source.

STEP 4

Remove Laptop power supply and power cord from computer bag.

Power Supply

Power Cord



Step 5
Plug Laptop Power
cord into power
supply and electrical
source





Step 6
Plug the power
supply into the
Laptop

Step7
Start the projector
by pressing the
Lamp Button

◀ AV Mute

Open ▶

Source
Search


Menu




Lamp




Temp




Enter




Step 8
Start the computer
by pressing the
silver button under
the left side of the
screen

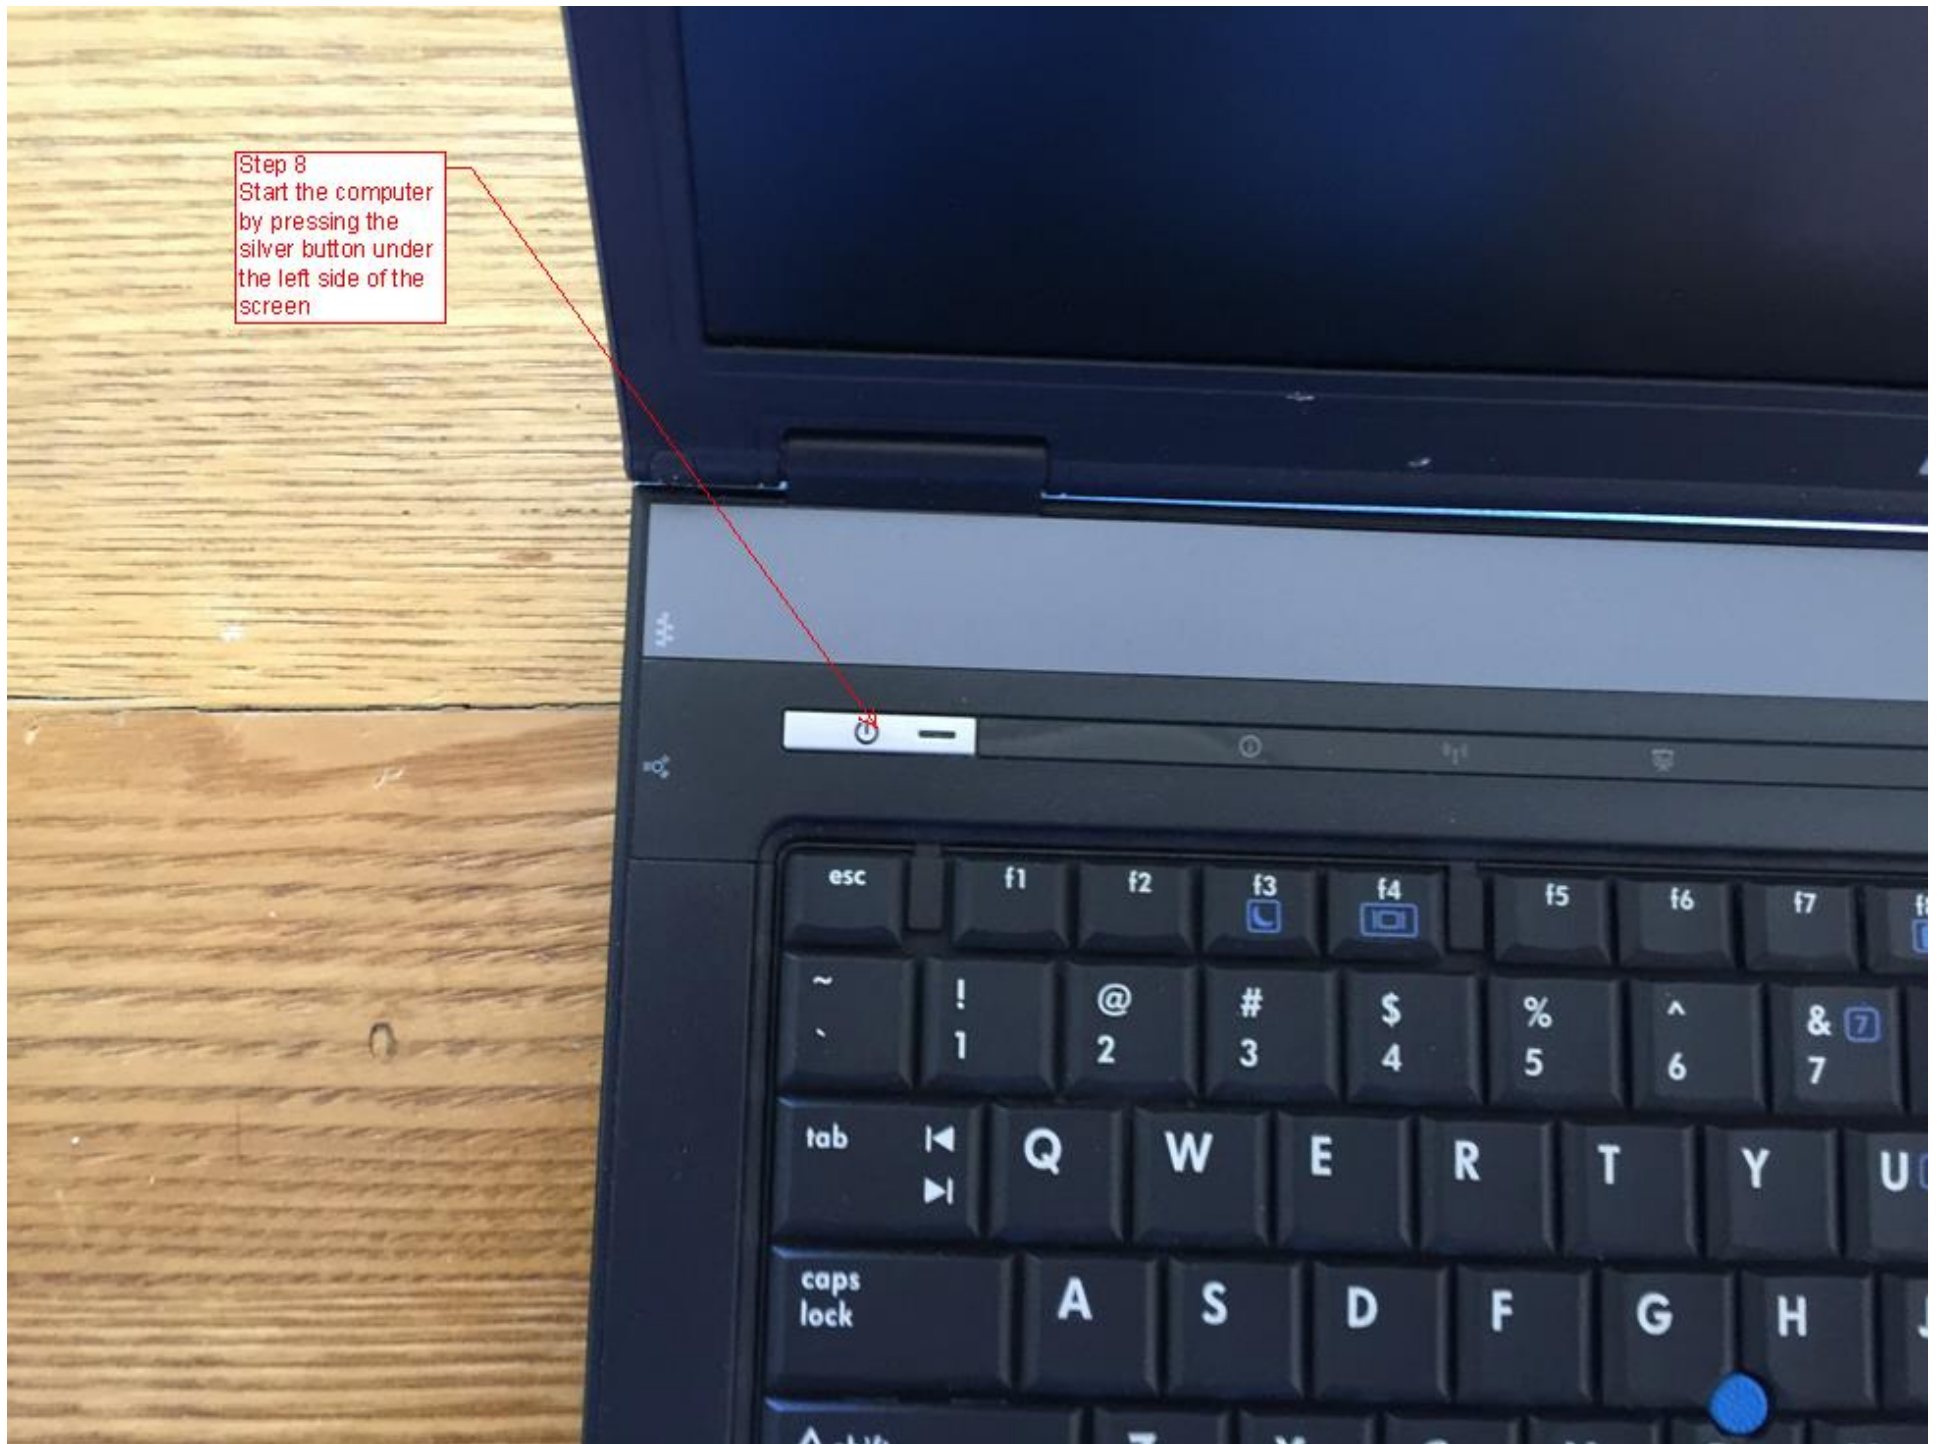


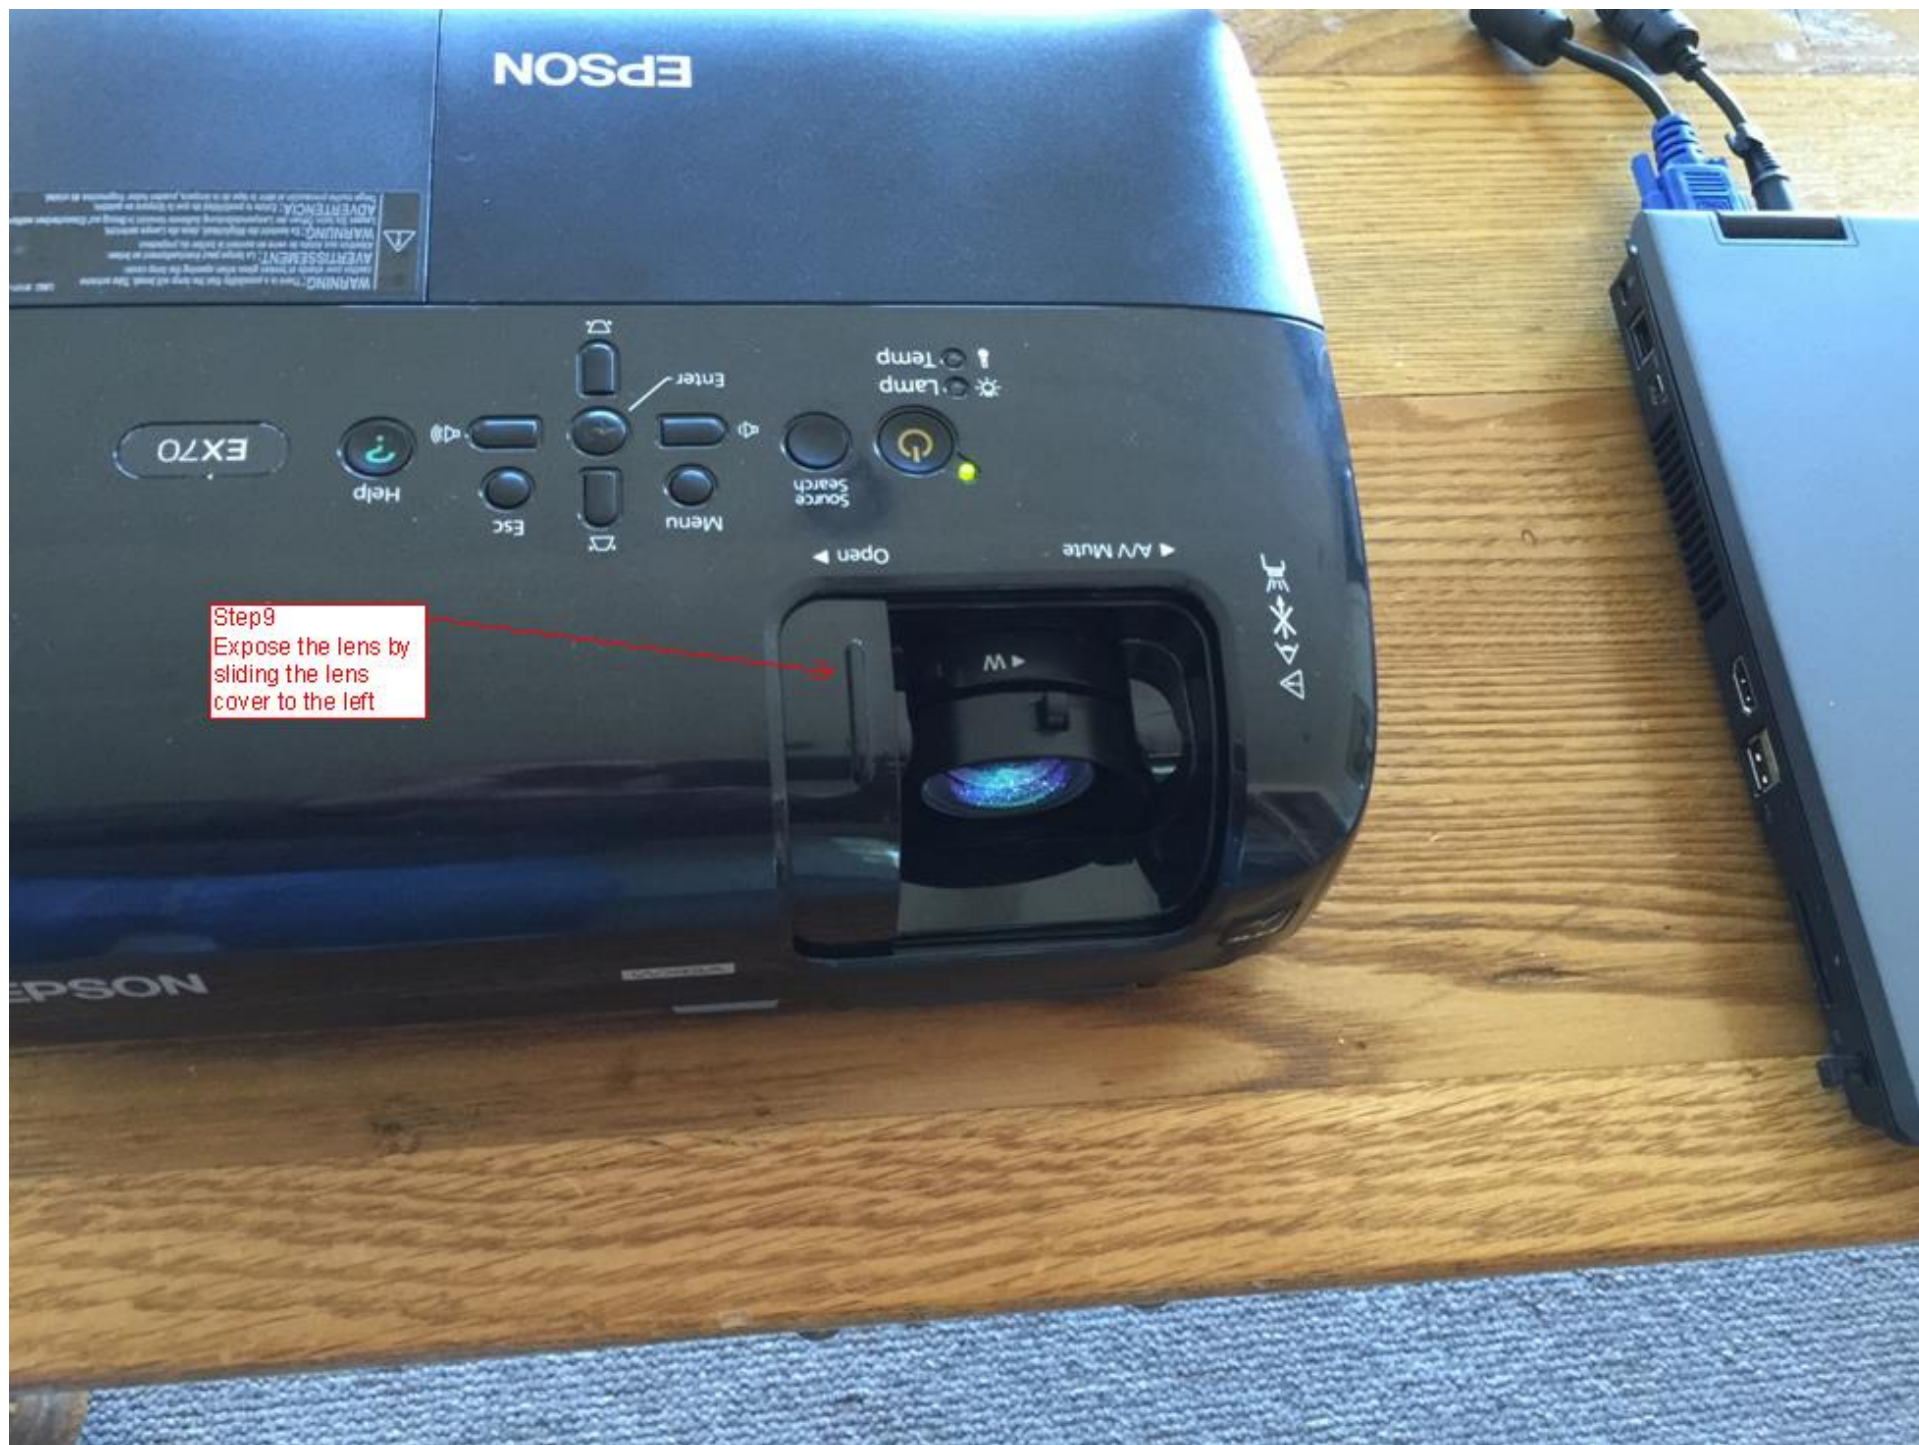

Step9
Expose the lens by
sliding the lens
cover to the left

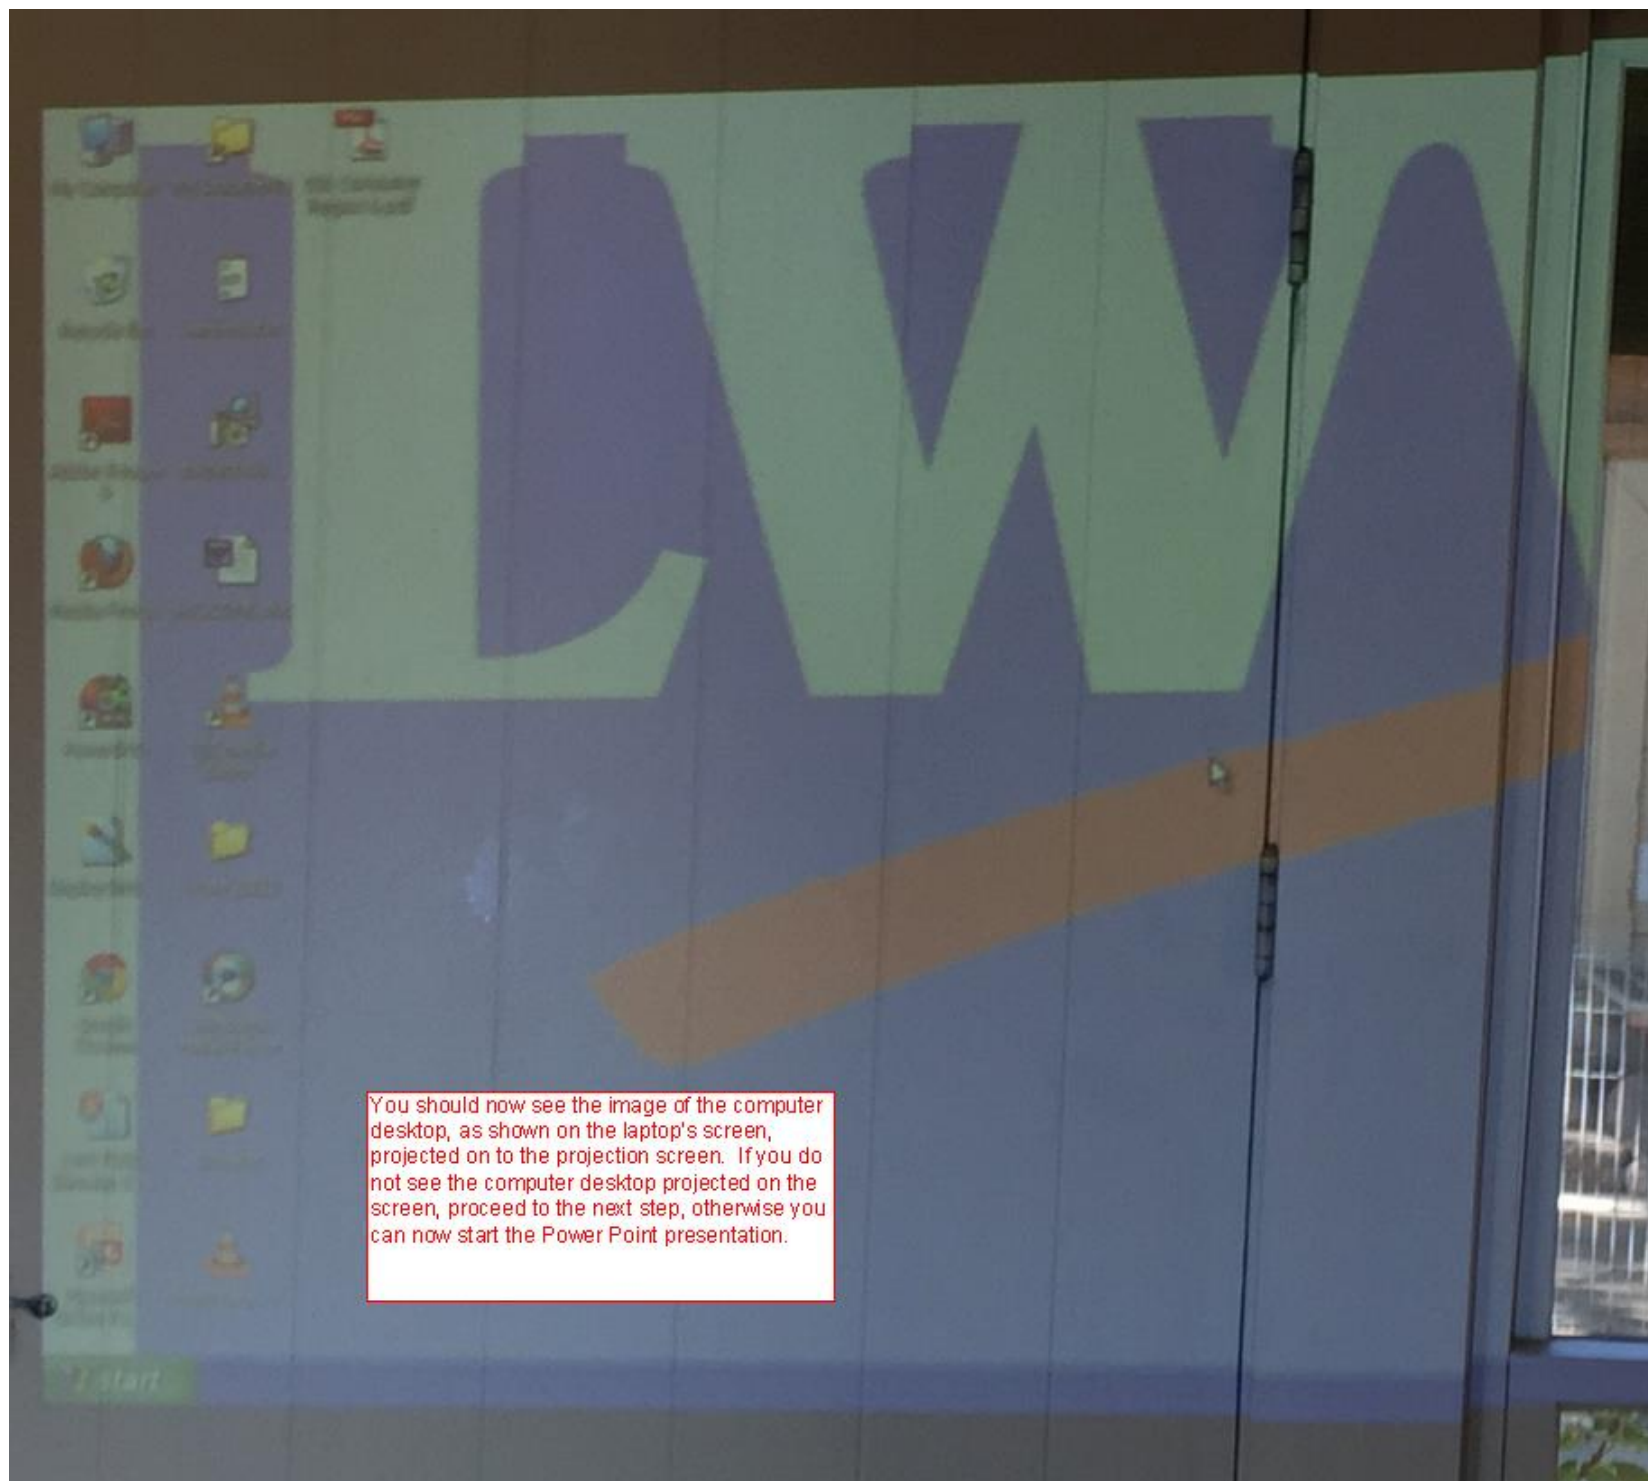

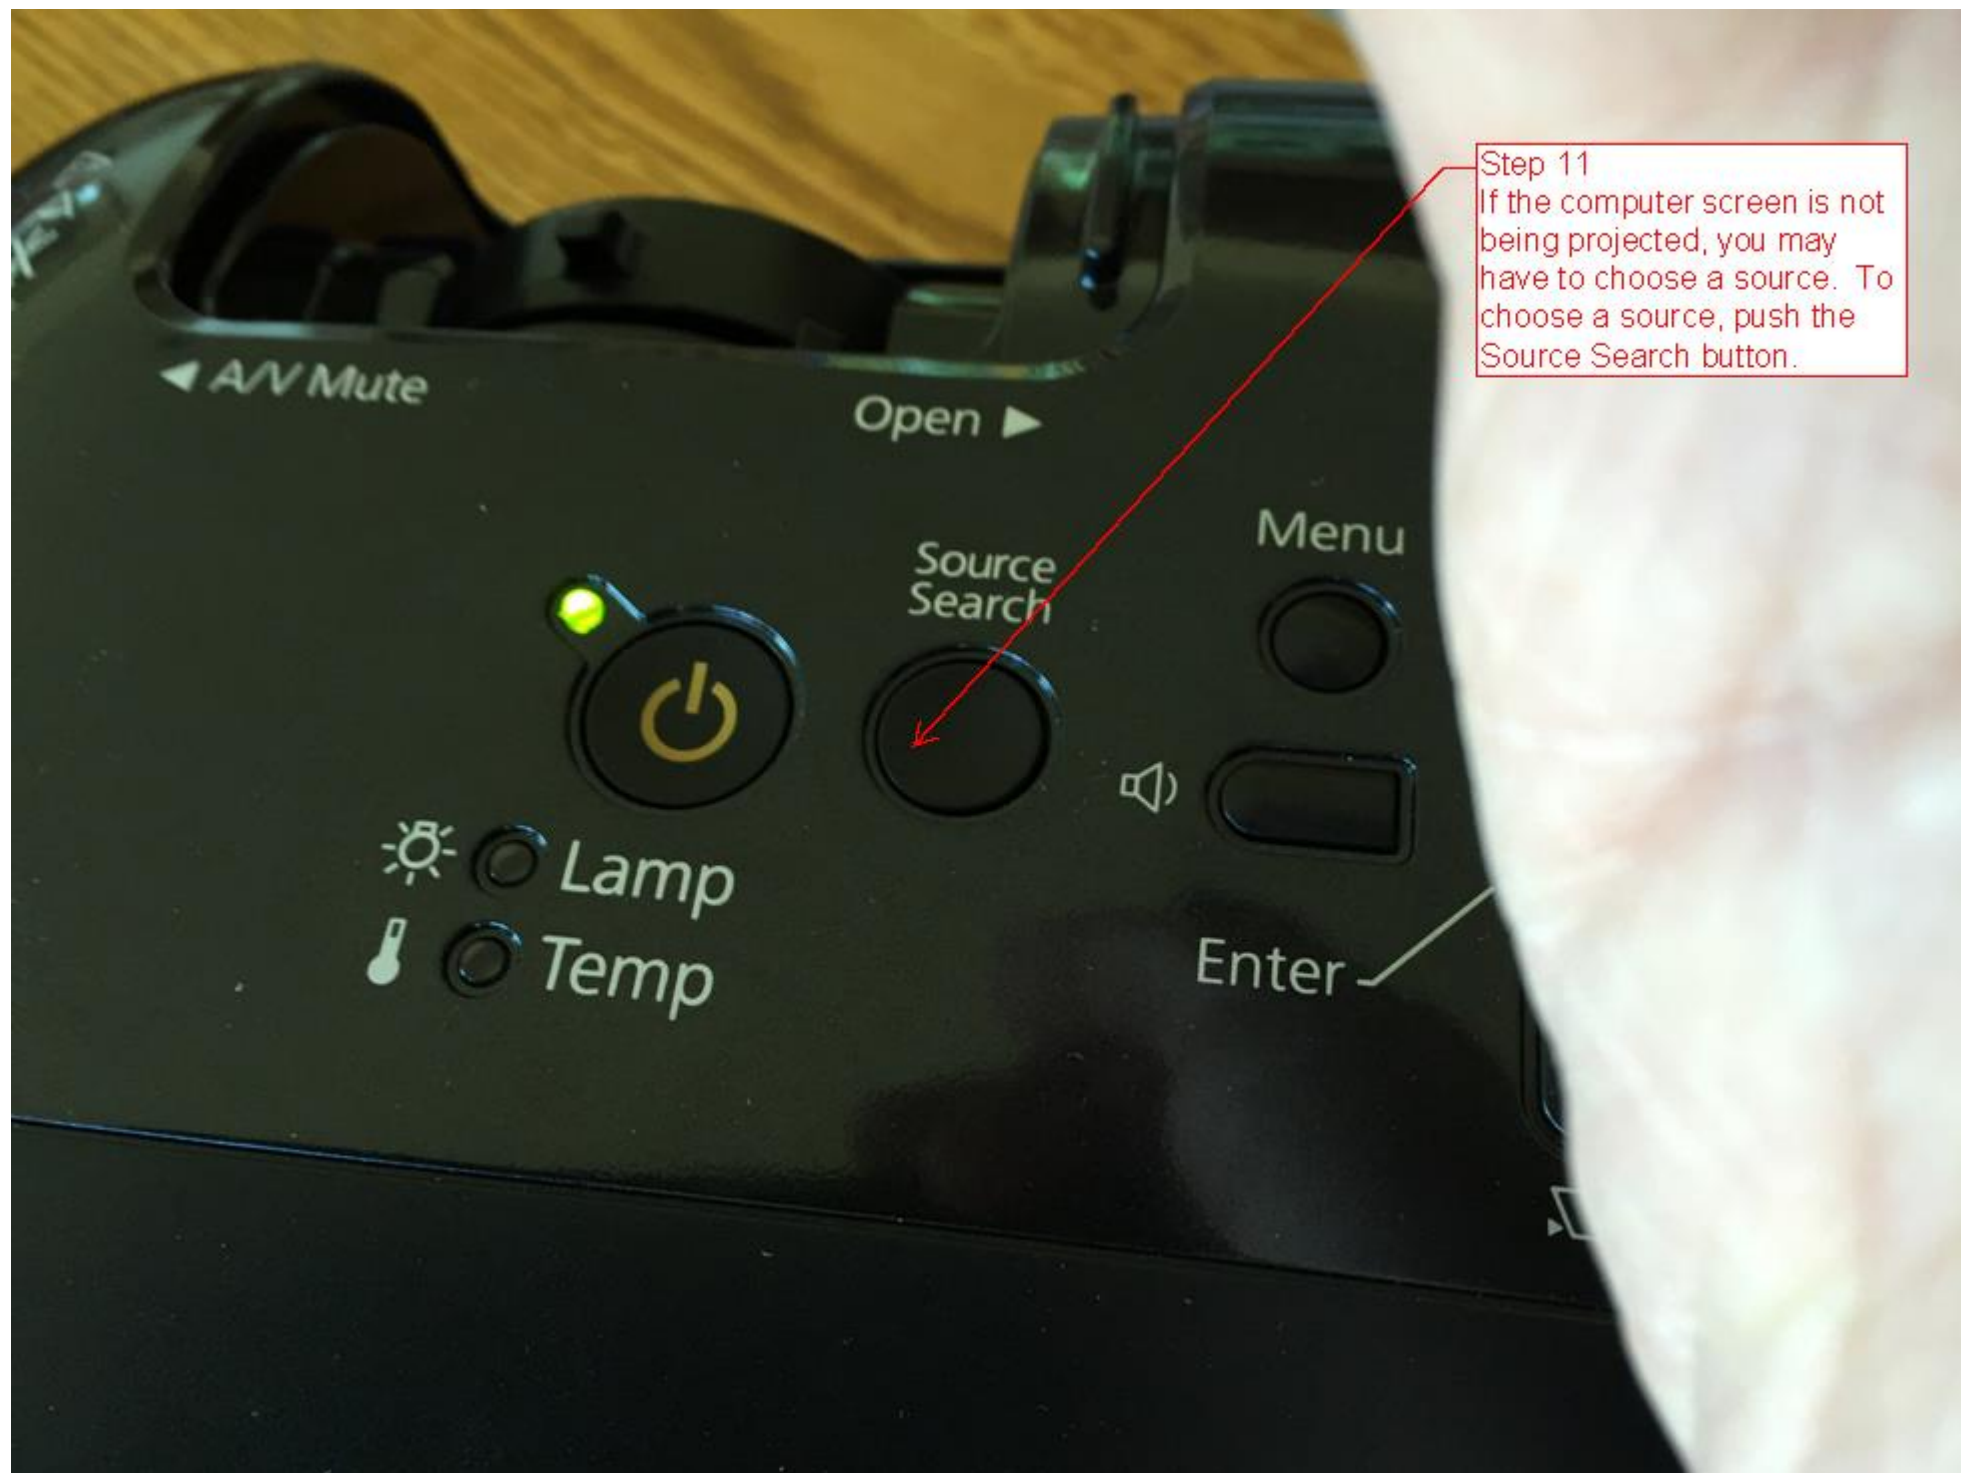




You should now see the image of the computer desktop, as shown on the laptop's screen, projected on to the projection screen. If you do not see the computer desktop projected on the screen, proceed to the next step, otherwise you can now start the Power Point presentation.




Step 11
If the computer screen is not being projected, you may have to choose a source. To choose a source, push the Source Search button.

The projector will project the screen as shown below. Select "Computer" by pressing the keys on the projector as shown on the next page.

[Source Search]

	Signal Status
 Computer	On
 S-Video	Off
 Video	Off
 HDMI	Off
 USB Display	Off
 All Slideshow	Off

Input the desired image signal.
Press  to select the source.

◀ A/V Mute

Open ▶

Press this button to select "Computer". The projector should now show the desktop and shown on the Laptop screen

Source Search

Menu

Esc

Help

EX70

Lamp

Temp

Enter


WARNING: There is a possibility that the lamp will break. Take extreme caution over shards of broken glass when opening the lamp cover.
AVERTISSEMENT: Le lampo peut éventuellement se briser. Attention aux éclats de verre en ouvrant le boîtier du projecteur.
WARNUNG: Es besteht die Möglichkeit, dass die Lampe zerbricht. Lassen Sie beim Öffnen der Lampenabdeckung äußerster Vorsicht in Bezug auf Glasschmelzen.
ADVERTENCIA: Existe la posibilidad de que la lámpara se rompa. Tenga mucha precaución al abrir la tapa de la lámpara, pueden haber fragmentos de vidrio.



Step 13

Next step is to straighten the image on the projection screen by making adjustments to the height and tilt of the projector by raising or lowering the three footings under the projector. The footing in the center adjusts the height. The footings on the rear corners adjust the tilt.

First adjust the tilt by rotating either the left or right footing on the rear corners of the projector.

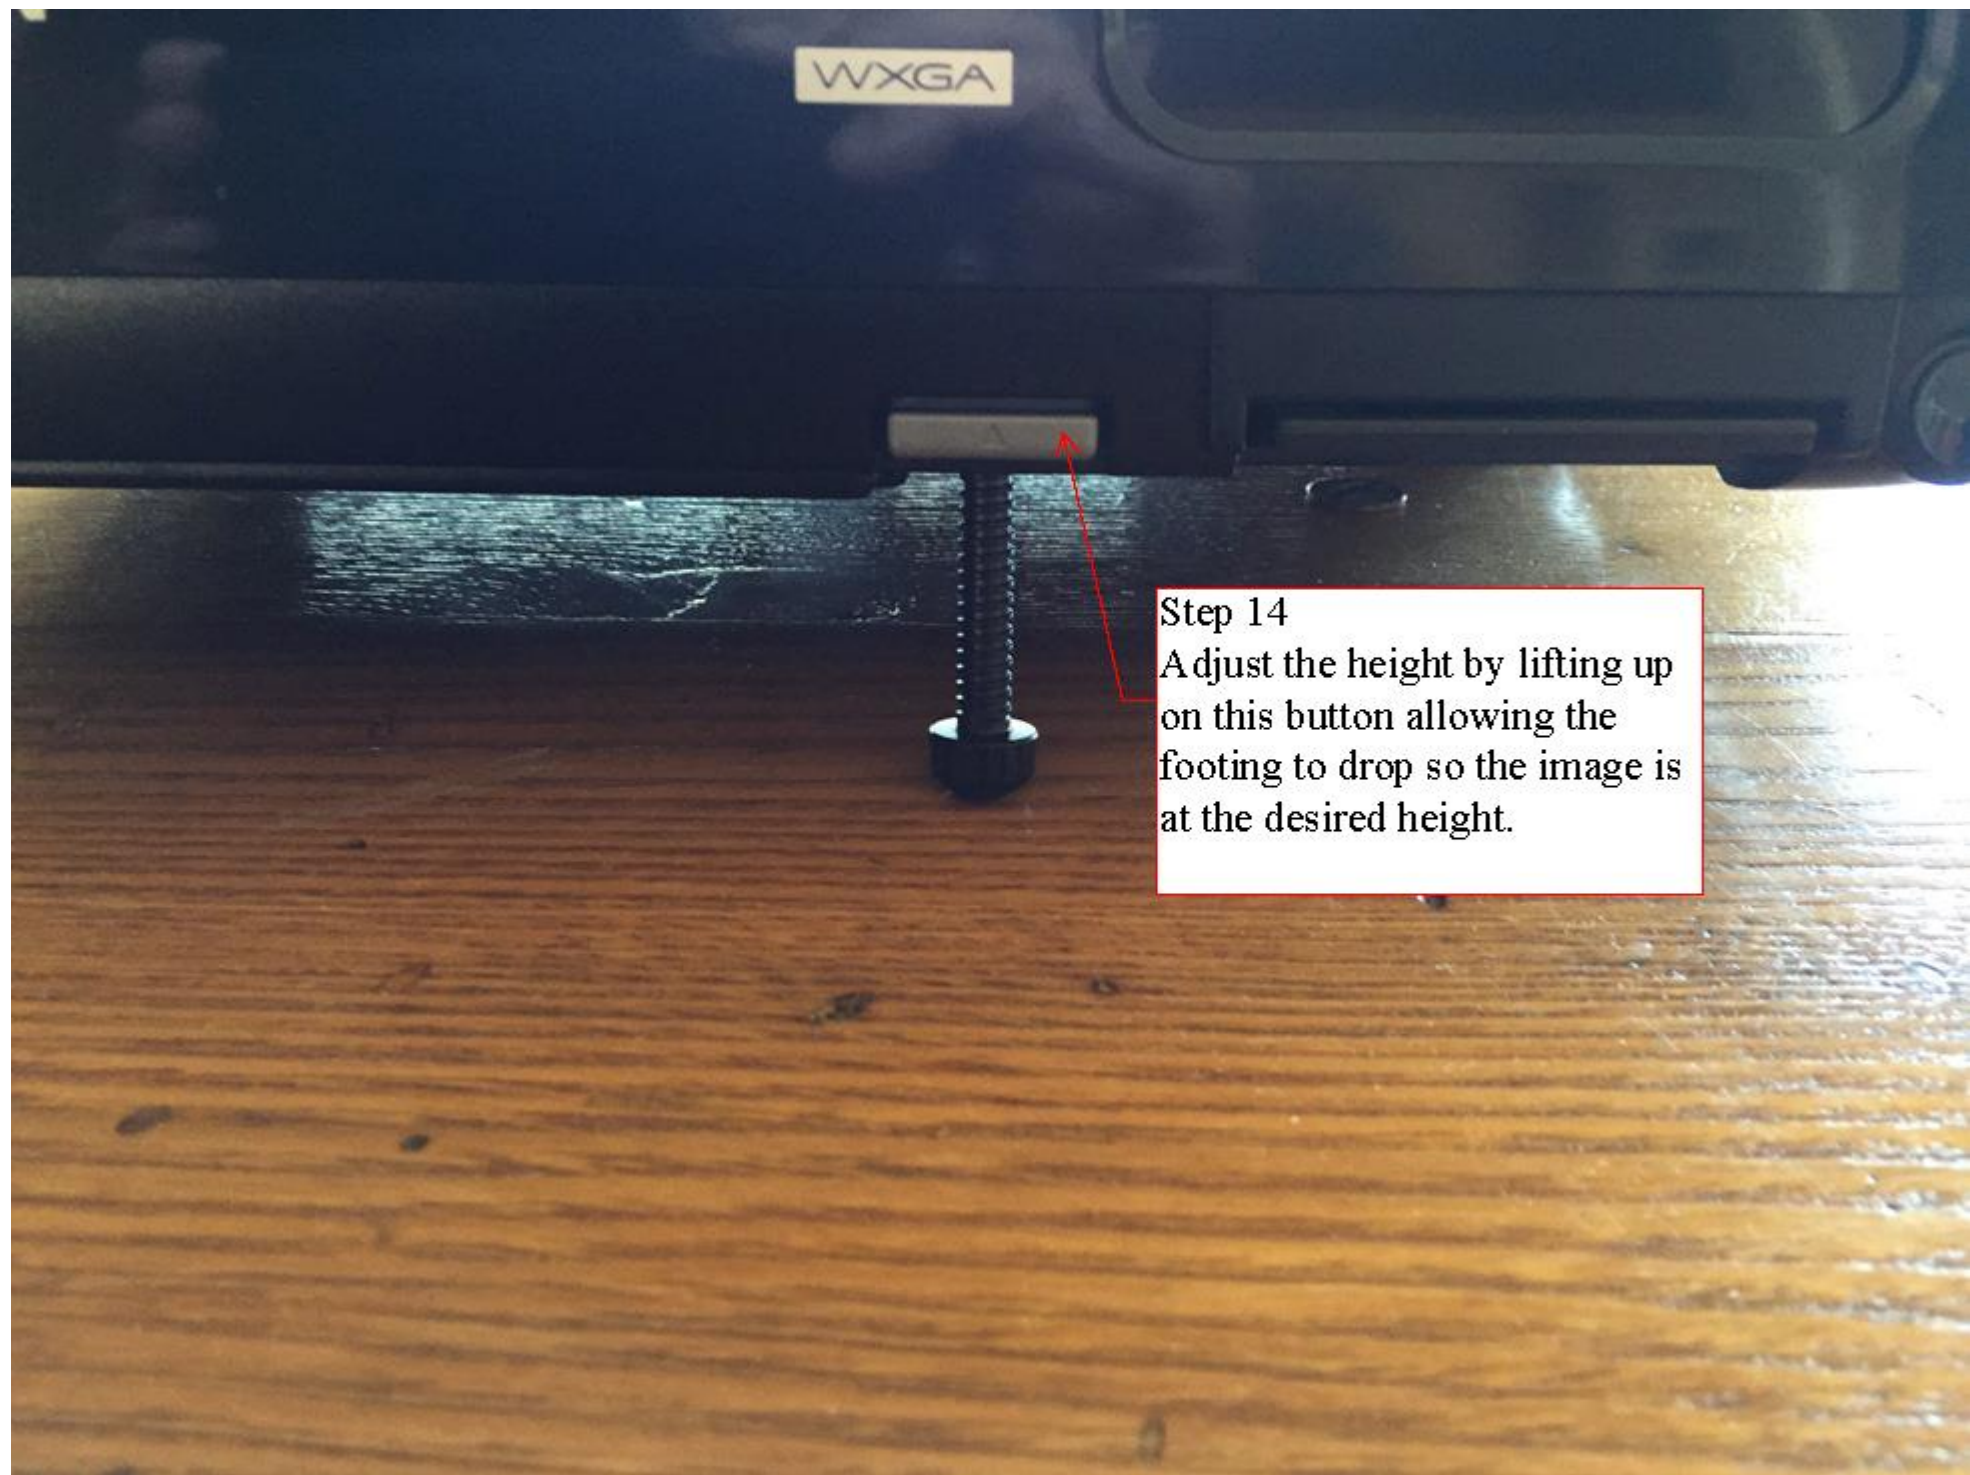

Step 14

Adjust the height by lifting up on this button allowing the footing to drop so the image is at the desired height.


HOW TO HOOKUP PROJECTOR TO THE LEAGUE COMPUTER WITH USB CABLE

If the VGA cable is unavailable, it is also possible to hookup the projector to the League computer with the USB cable. This requires special software to be installed, which it is already installed on the League computer, but may not be installed on other computers. The software is available in the projector bag in a DVD labeled "EX70".

The square end
plugs into the
projector

The flat end plugs
into the computer

Remove the USB cable from the
computer bag. One end of the cable
has a square plug that goes into the
projector. The other end has a flat plug
that goes into the computer.

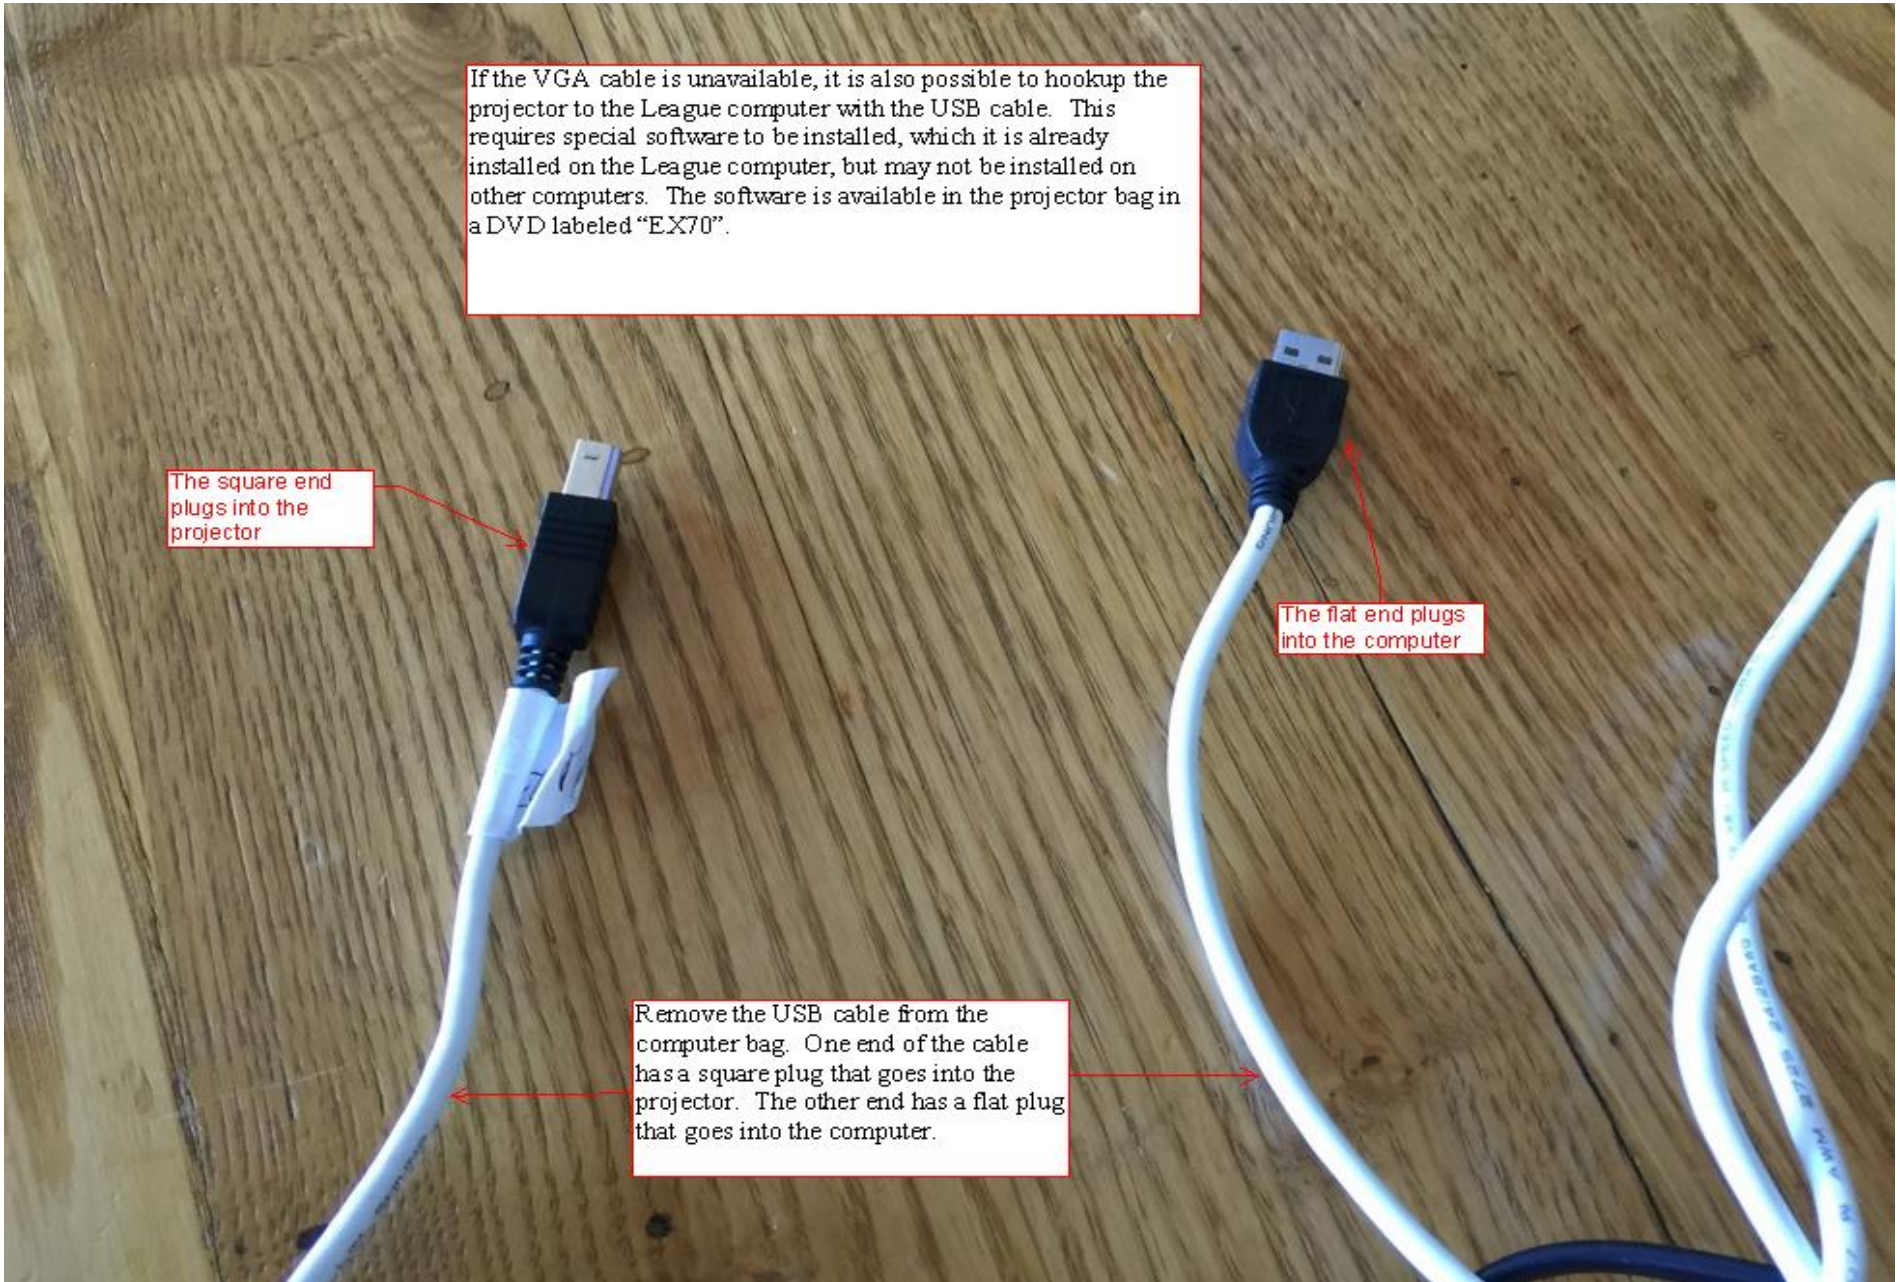











The square end plugs into the projector

If the desktop is not being projected to the screen, you will have to choose the source as described previously in Step 11 (Hookup with VGA Cable). In this case choose "USB Display".

[Source Search]

	Computer	Off
	S-Video	Off
	Video	Off
	HDMI	Off
	USB Display	Off
	Slideshow	Off

- Input an image signal.
- Press  to select the source.

[]:Select [Enter]:Enter